

# FICHA TÉCNICA SÍLEX

REFERENCIA:

PQ1001

NOMBRE COMERCIAL:

SILICA SAND 3 - 6 mm - 25Kg pack



Silica sand is composed of more than 99% silicon dioxide (SiO<sub>2</sub>) and small quantities of other minerals, generally in the form of oxides.


It is used as a filter bed for water purification and potabilisation, intervening in the retention of very small particles that are not separated by decantation.

Sand is classified by grain size both wet and dry, by sieving through various screens.

	MESH(mm)	GR	%	FACTOR	PRODUCT	DISTRIBUTION
1	0,000	0,00	0,0000000	1	0,000000	
2	0,000	0,00	0,0000000	3	0,000000	
3	0,000	0,00	0,0000000	6	0,000000	
4	0,000	0,00	0,0000000	9	0,000000	
5	0,000	0,00	0,0000000	15	0,000000	
6	0,000	0,00	0,0000000	25	0,000000	
7	10,000	0,00	0,0000000	35	0,000000	
8	8,000	0,00	0,0000000	45	0,000000	
9	6,000	6,75	6,7648827	60	405,892965	
10	4,000	57,31	57,4363600	81	4652,345159	
11	3,000	35,16	35,2375225	118	4158,027661	
12	1,810	0,39	0,3908599	164	64,101022	
13	FONDO	0,17	0,1703748	275	46,853077	
<b>TOTAL</b>		<b>99,78</b>	<b>100,00</b>		<b>9327,219884</b>	

# FICHA TÉCNICA SÍLEX

osmo filter®

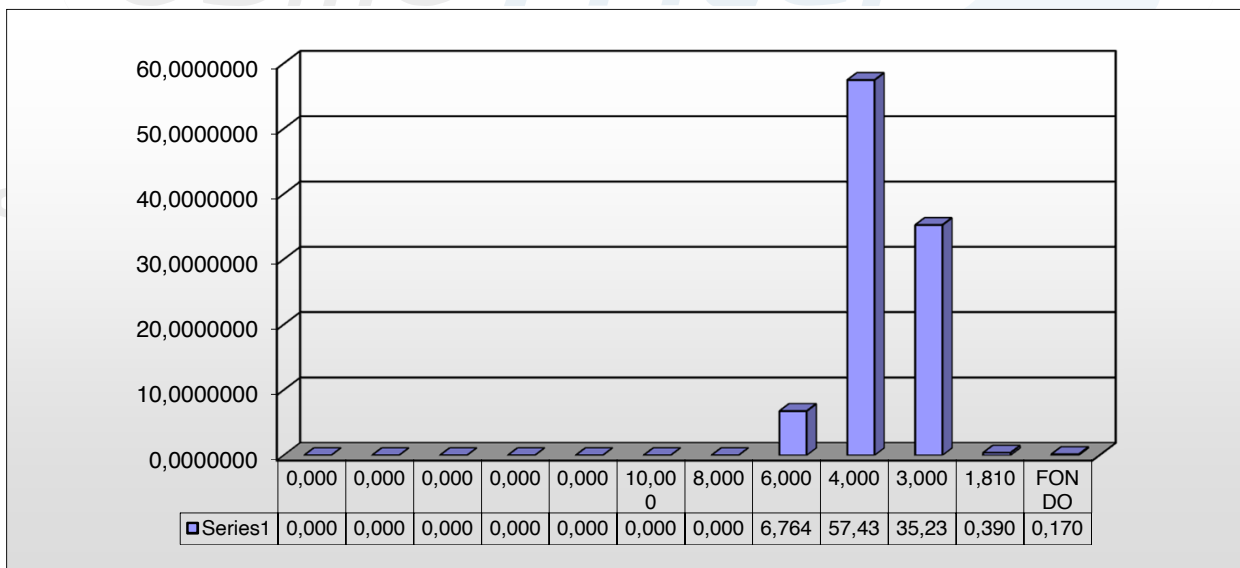

osmo filter®

Tratamiento Integral del Agua

osmo filter®

Tratamiento Integral del Agua